▶ **FULL VIDEO TUTORIAL – Scan to watch the video**

- ✓ Always start with the **backrest**, then the **seat cushion**, then the **headrests**
- ✓ Never force – adjust **gradually**
- ✓ Detailed step-by-step version below:

1 FITTING PREPARATION



- Remove the covers from their **box**.
- Identify each piece using the **label** inside each cover.
- Check you have: **backrest cover**, **seat cushion cover** and **headrest cover**.

⚙ OPTION – HANDLES, TRAYS OR ARMRESTS

- If your vehicle has handle slots, trays or armrests, **turn the cover inside out**.
- Pull the **RED thread** to open the cut-outs.
- **Turn the cover back the right way** before fitting it.



2 FITTING THE FRONT BACKRESTS



① Remove the headrest



- Press the **release button** and pull the headrest **upwards** to remove it from the backrest.
- Set it aside for **the final step**.
- ⚠ **If the headrest cannot be removed**, your cover has a **velcro slot** – fit the cover directly without removing the headrest.

② Quick backrest fitting



- Find the side of the cover with the **airbag label** and position it towards the door.
- Slide the cover **over the bag** onto the backrest from top to bottom.
- **Tear out the plastic bag** by pulling it.
- Tuck the **excess fabric** between the backrest and the seat cushion.
- Secure the **velcro or hooks** to hold the cover in place.



✅ **Repeat steps ① and ② on the second seat before moving on to step 3.**

3 FITTING THE FRONT SEAT CUSHIONS





- Place the cover on the seat cushion **starting from the front** of the seat.
- Tuck the **excess fabric** between the backrest and the seat cushion.
- Secure the **velcro or hooks** to hold the cover in place.

TIP – SPOON

Use a **spoon or flat plastic tool** to slide the fabric under the plastic parts without damaging the seat.

4 FITTING ALL ARMRESTS



- **Turn the cover inside out** to make fitting easier.
- Slide it over the armrest by **gliding the fabric** for a good fit.

5 REAR BACKREST

REAR

- Remove the **rear headrests** – set aside for the final step.
- Position the cover over the **backrest**.
- **Tilt the seat** forward to make fastening easier.
- Secure with the **hooks or velcro**.
- Insert the **excess fabric** using a spoon.



6 REAR SEAT CUSHION

REAR


- Place the cover on the **rear seat cushion**.
- Tuck the **excess fabric** between the backrest and the seat cushion.
- Secure with the **velcro or hooks**.



TIP

Use a **spoon** for hard-to-reach corners.

7 FITTING ALL HEADRESTS

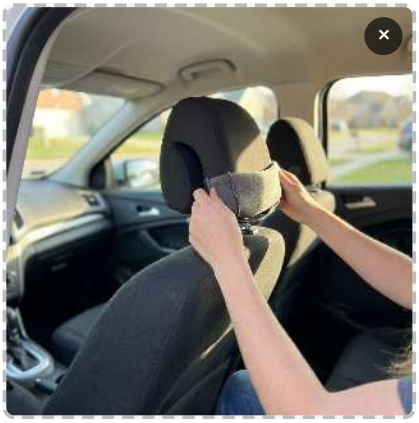

Same procedure for **front and rear** headrests:

- **Turn the cover inside out** to make fitting easier.
- Slide it over the headrest by **gliding the fabric** for a good fit.
- Put the headrest back in its guide and **click it into place**.



TIP – EASY FITTING
Gently position it by pulling the edges once in place for an **impeccable** finish. If the cover opening seems tight, it is better to **slide it on from the side**.

Fitting complete! Check the overall alignment of all covers and adjust if necessary.

